




FreeMotion Dispenser Specifications



Technical Documentation

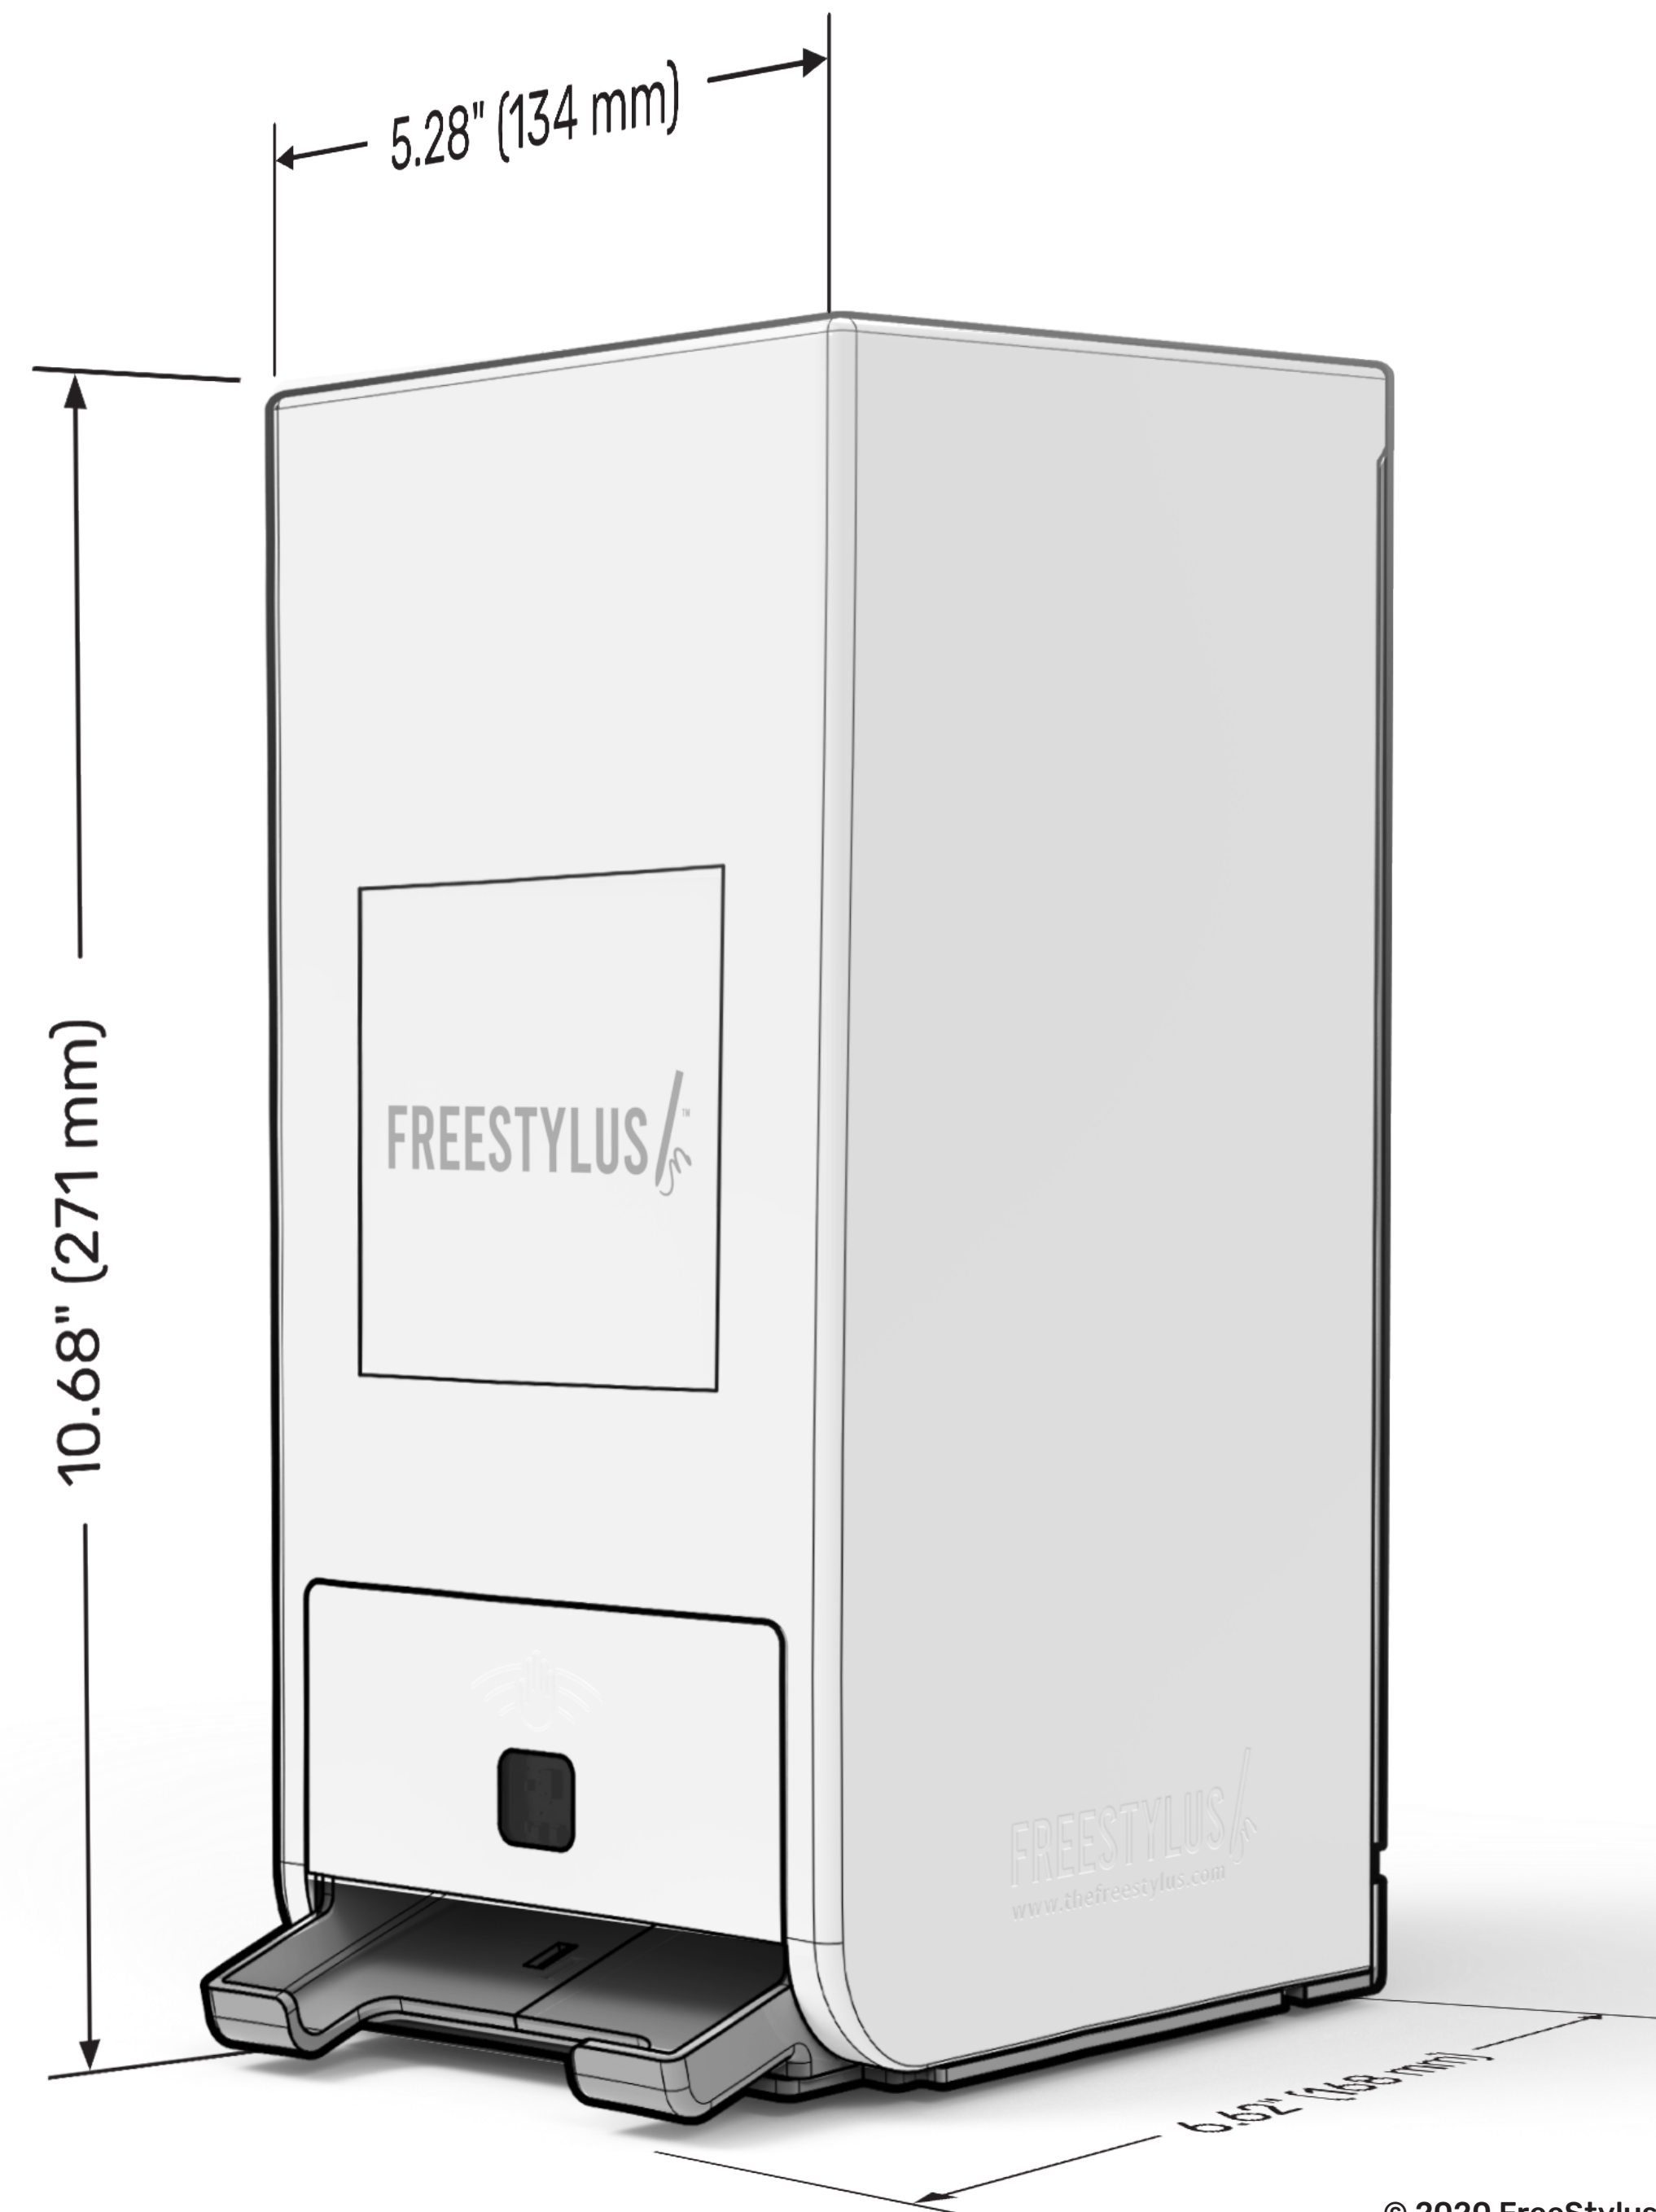


FreeMotion Dispenser Technical Data	
Power Requirements:	100-240 VAC, 50-60 Hz, 2.0A
Unit Operating Power:	24 VDC
Weight:	2.5 lbs. w/o stylus
Physical Size:	5.28" W x 10.38" H x 6.62" D
Housing Material:	ABS
Stylus Capacity:	450
Mounting Options:	Countertop, Wall, Pedestal (Accessory)
Operating Environment:	Temperature 50° - 95° F Humidity 20% - 90% non-condensing
Storage Environment:	Temperature 40° - 140° F Humidity 5% - 95% non-condensing
Ranging + Gesture Sensor:	940 nm laser VCSEL Eye Safe Class 1 laser device compliant with latest standard IEC 60825-1:2014 3 rd edition
Certifications:	FCC
*For use with Recyclable FreeStylus only	

The description and illustration in this document are to serve as a reference only. FreeStylus reserves the right to make changes and improvements in design, dimension, specification, and subsequent iterations of it's product. Visit our website for more information about this product.


<https://www.thefreestylus.com>

This FreeMotion automated touchless dispenser operates with FreeStylus’ patent-pending recyclable stylus. The dispenser is constructed from high strength, low maintenance polymer materials, and requires minimal maintenance. It features a custom key for opening the self-latching cover and an eye-safe motion sensor for dispensing initiation.

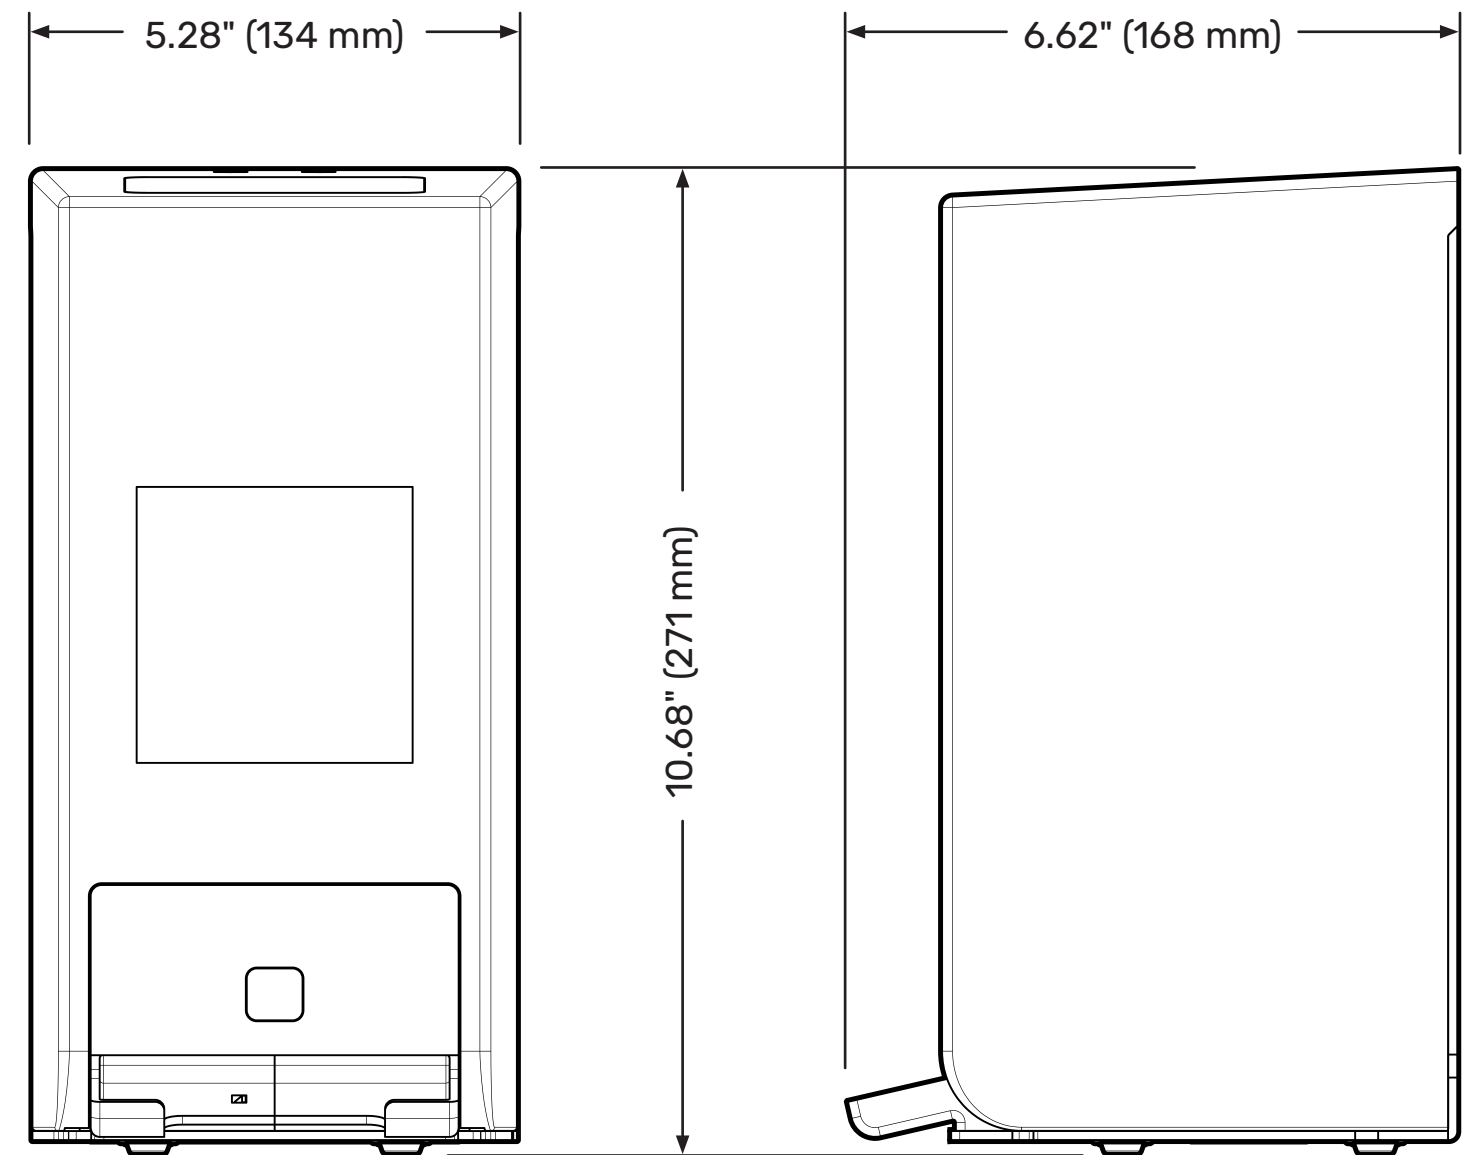

Front View:

Side View:

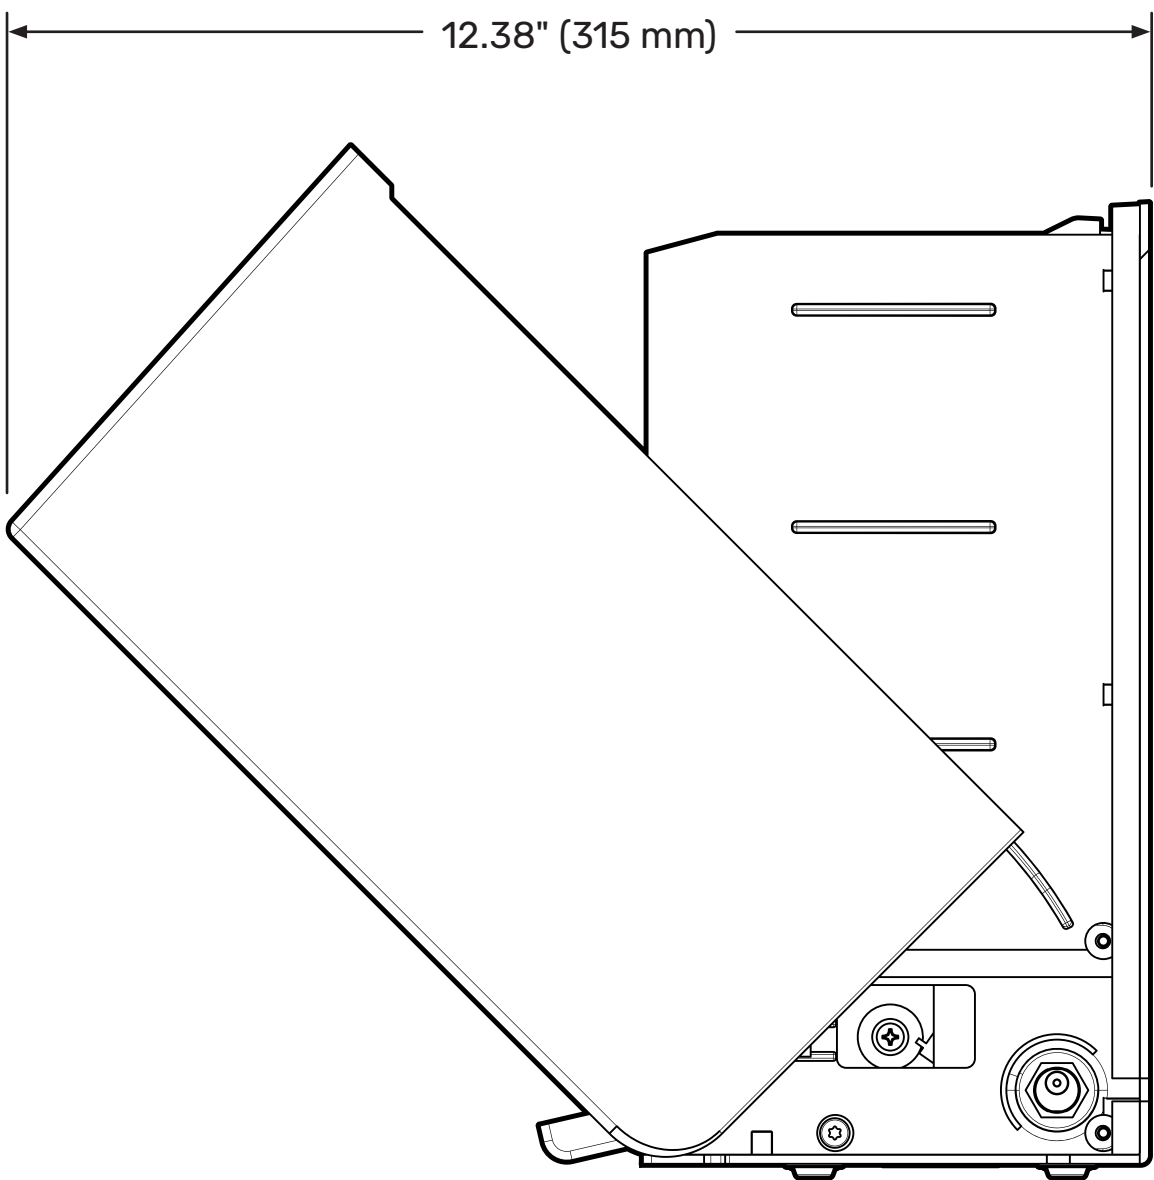

Side View w/ Open Cover:

FreeMotion Dispenser Part Numbers		
Part Number	Color	Imprint
FMD-022-WG-S	White + Gray	Standard
FMD-022-WG-C	White + Gray	Custom
FMD-022-BG-S	Black + Gray	Standard
FMD-022-BG-C	Black + Gray	Custom